


Main Technical Specifications:

PARAMETERS	VALUE
Pixel Pitch	3.9 mm
Pixel configuration	1R1G1B
LED type	3-in-1 Black SMD2121
Brightness	1200 cd/m ²
Color temperature	6500K
Viewing angle	H: 120°; V:100°
Pixel density	65536 pixels/m ²
Recommended viewing distance	3.9 M
Module size	250mm×250mm
Cabinet size	W500m×H500mm×D84mm
Weight	8.5 kg/panel
Area	0.25 m ²
Material	Die-casting Aluminum
Aspect ratio	1:1
Ingress protection	IP30
Operating Temperature/Humidity	0°C~+45°C/10~90%RH
Storage Temperature/Humidity	-40°C~+60°C/10~90%RH
Pixels per panel	128×128 Dots
Color	281.4 trillion
Gray scale	65536 levels per color
Brightness control	Manual/Automatic
Contrast ratio	3000:1
Processing depth	16bits
Video frame rate	50/60Hz
Refresh rate	3840Hz
Input voltage	100~240VAC
Input power frequency	47~63Hz
Input power <max>	135W/panel
Input power <typical>	45W/panel
Life Time	≥100,000 Hours
LED Wavelength	R:620~630nm G:520~535nm B:465~475nm
Driving Method	1/8 Scan, Constant Current
Input signal	S-VIDEO, CVBS, YPbPr, RGB,VGA,DVI,HDMI,HDSDI & DP, etc
Rigging form	Hanging/Fixed
Data interconnection	CAT5 Cable (L≤100m); Multi-mode fiber (L≤300m); Single mode fiber) (L≤15km)

Note: The power is just for reference, specification subjected to change without prior notice.

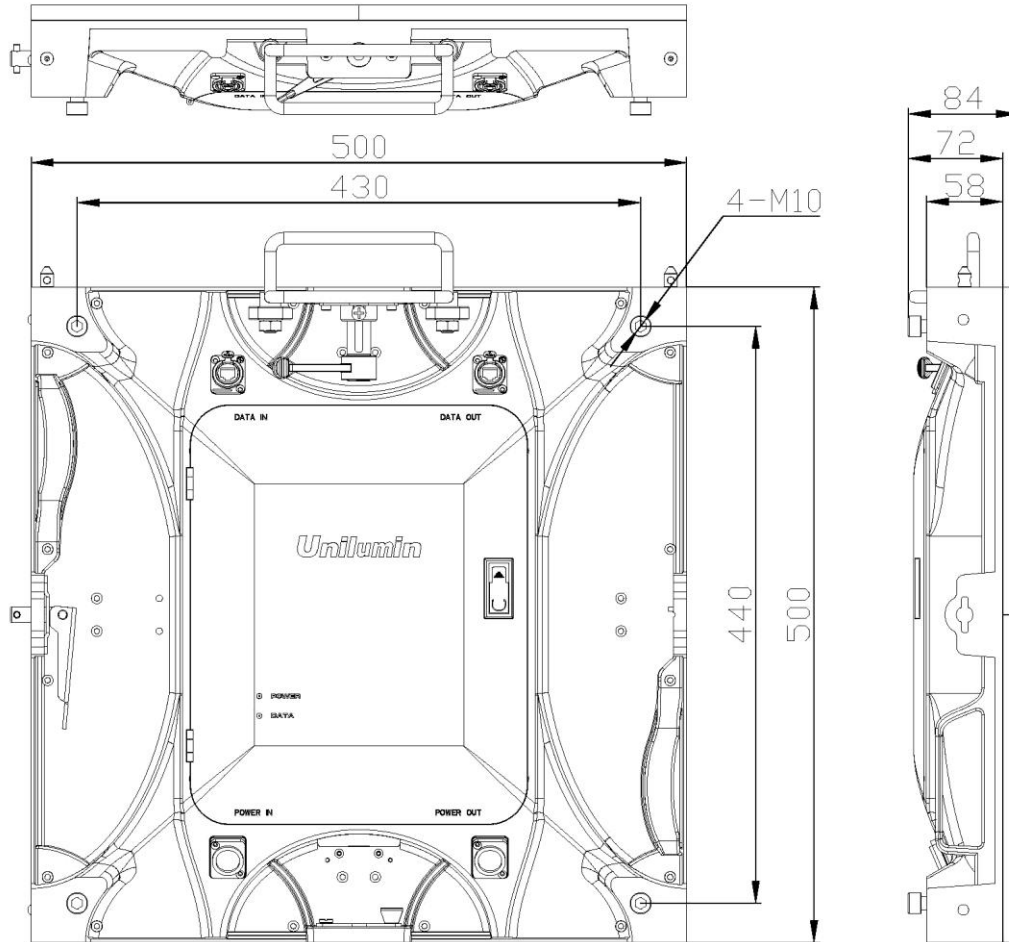

Utile3

UTILE SERIES

Unilumin



FOR SALES AND RENTAL

MATRIXVISUAL.COM 1.888.8MATRIX

1748 West Business Center Drive. Orange, California 92867

